




Standard Self-locking Cable Ties

- Provide up to 50% more tensile strength and 15% larger bundle diameters than competitive product.
- Positive-locking teeth, closely and evenly spaced on both sides of the body, provide increased strength and permit fine adjustment for any bundling need.
- Raised ridges on the cable ties' bent tips are designed to provide a secure grip while requiring minimal effort to close.
- The patented, one-piece, injection-molded construction eliminates failure due to parts working loose or breaking off.
- Smooth, rounded edges make the ties easy to handle and install without cutting hands.
- Self-locking cable ties are recognized under the Component Program of Underwriters laboratories Inc. and meet UL94V-2 Flammability Classification.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).

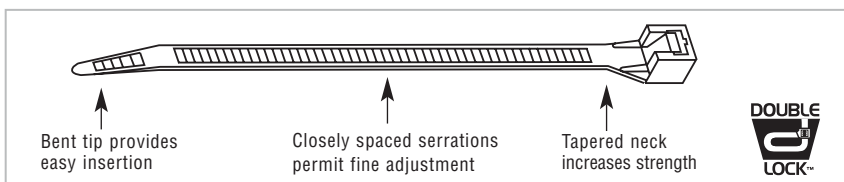

Melting point:
265°C (509°F)

Brittleness
temperature:
-112°C (-169°F)
at 2% water

Natural Nylon

Part No.	Approx. Length	Approx. Width	Loop		
			Tensile Strength	Max. Dia.	Pkg. Qty.
TR418	4"	.100"	18 lbs.	1 ⁵ / ₁₆ "	100
TR620	6"	.140"	45 lbs.	1 ³ / ₈ "	100
TR850	8"	.170"	75 lbs.	2"	100
TR1150	11"	.170"	75 lbs.	3"	100
TR1450	14"	.170"	75 lbs.	4"	100

UV-resistant Black Nylon

Part No.	Approx. Length	Approx. Width	Loop		
			Tensile Strength	Max. Dia.	Pkg. Qty.
TR418B	4"	.100"	18 lbs.	1 ⁵ / ₁₆ "	100
TR620B	6"	.140"	45 lbs.	1 ³ / ₈ "	100
TR850B	8"	.170"	75 lbs.	2"	100
TR1150B	11"	.170"	75 lbs.	3"	100
TR1450B	14"	.170"	75 lbs.	4"	100

Heavy-duty Cable Ties

- One piece construction offers added strength and durability.
- Manufactured from Nylon 6/6 material and meets UL94-V2 Flammability Classification.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).


Natural Nylon

Part No.	Approx. Length	Approx. Width	Loop	
			Tensile Strength	Max. Dia.
TR8120	8"	.295"	120 lbs.	2"
TR14120	14 ¹ / ₂ "	.295"	120 lbs.	4"
TR24120	24"	.295"	175 lbs.	9"
TR36120	36"	.295"	175 lbs.	11"

UV-resistant Black Nylon

Part No.	Approx. Length	Approx. Width	Loop	
			Tensile Strength	Max. Dia.
TR8120B	8"	.295"	120 lbs.	2"
TR14120B	14 ¹ / ₂ "	.295"	120 lbs.	4"
TR24120B	24"	.295"	175 lbs.	9"
TR36120B	36"	.295"	175 lbs.	11"



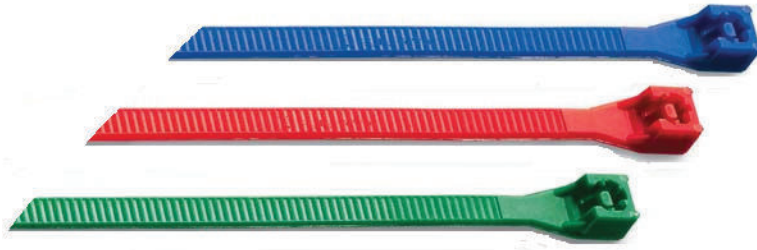

Standard Colored Cable Ties

- Use 8" colored ties for wire bundle identification.
- Self-locking cable ties are recognized under the Component Program of Underwriters laboratories Inc. and meet UL94V-2 Flammability Classification.
- Operating temperature: -40°C to 85°C (-40°F to 185°F).



Red

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Maximum Bundle Diameter
TR850R	8"	.170"	75 lbs.	2"



Yellow

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Maximum Bundle Diameter
TR850Y	8"	.170"	75 lbs.	2"



Green

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Maximum Bundle Diameter
TR850G	8"	.170"	75 lbs.	2"



Blue

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Maximum Bundle Diameter
TR850BL	8"	.170"	75 lbs.	2"



Purple

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Maximum Bundle Diameter
TR850PU	8"	.170"	75 lbs.	2"



Orange

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Maximum Bundle Diameter
TR850OR	8"	.170"	75 lbs.	2"

ALSO AVAILABLE IN GREY (TR850GR), FLOURESCENT PINK (TR850FP), FLOURESCENT BLUE (TR850FB), BROWN (TR850BR), & WHITE (TR850W)



KATCO SERVICE PARTS INC.





Push-mount Ties

- Push-mount cable ties snap quickly into a 1/4" hole to attach a bundle to another surface.
- The mount portion is easily passed into a pre-drilled hole and locks into place.
- All ties are made with durable 6/6 nylon.
- Recognized under the Underwriters Laboratories Inc.
- For use at temperatures not exceeding 85°C (185°F).
- Meets UL94V-2 Flammability Classification.



Natural Nylon					UV-resistant Black Nylon				
Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Max. Dia.	Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Max. Dia.
TRPM850	8"	.190"	50 lbs.	1 1/4"	TRPM850B	8"	.190"	50 lbs.	1 1/4"

Cable Tie Tools

- Strong tools at competitive prices.
- Tension control allows adjustment for a range of lightweight through 75 lbs. tension setting.




Part No.	Description
T-100	Standard Cable Tie Tool





Mounting Ties

- Mounting tab cable ties have a molded-in screw hole for securing bundles of wire on virtually any surface that has or can accept a drilled hole.
- Up to a ¼" screw size can be used, or a comparable rivet size.
- All mounting tab cable ties use durable 6/6 nylon.
- Recognized under the Underwriters Laboratories Inc.
- For use at temperatures not exceeding 85°C (185°F).
- Meets UL94V-2 Flammability Classification.

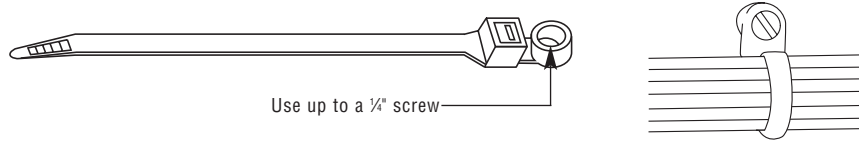

Standard Natural Nylon

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Max. Bundle Dia.	Max. Screw Size
TRH620	6½"	.170"	50 lbs.	1¼"	10
TRH850	8"	.170"	50 lbs.	2¾"	10
TRH1150	11"	.170"	50 lbs.	3"	10

Standard UV-resistant Black Nylon

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Max. Bundle Dia.	Max. Screw Size
TRH620B	7"	.170"	50 lbs.	1¼"	10
TRH850B	8"	.170"	50 lbs.	2"	10
TRH1150B	11"	.170"	50 lbs.	3"	10

Heavy-duty Natural Nylon

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Max. Bundle Dia.	Max. Screw Size
TRH14120	14"	.295"	120 lbs.	4"	¼"


Heavy-duty UV-resistant Black Nylon

Part No.	Approx. Length	Approx. Width	Loop Tensile Strength	Max. Bundle Dia.	Max. Screw Size
TRH14120B	14"	.295"	120 lbs.	4"	¼"



Identification Ties

- Durable nylon 6/6.
- Meets UL94V-2 Flammability Classification.
- Matte finish readily accepts ink for clear identification.
- Fasten and identify bundles at the same time.



Identification Ties

Part No.	Approx. Length	Max. Pad Size	Loop Tensile Strength	Maximum Bundle Diameter
TRID850	8"	1" x ¾"	50 lbs.	1¾"

KATCO SERVICE PARTS INC.





Screw Mount Bases

- Low profile for use where height is limited.
- The counter-sunk hole ensures that the screw or rivet will not interfere with your cable tie.
- Meets UL94V-2 Flammability Classification.
- For use at temperatures not exceeding 85°C (185°F).
- Recognized under the Component Program of Underwriters Laboratories Inc.
- The 2-way and 4-way entry screw mount bases can be used on all self-locking ties up to 14" and 75 lb. tensile strength.
- Bases made with durable 6/6 nylon.

4-way Entry

Part No.	Base Dimension	Screw Hole Size	Color
TRMP	1½" x 1½"	#10	Natural
TRMPB	1½" x 1½"	#10	Black



Screw Mount Bases

- Narrow and higher design for crowded surface areas.
- Deep cradle design provides extra support for large bundles and many components.
- Bases made with durable 6/6 nylon.
- Recognized under the Component Program of Underwriters Laboratories Inc.
- Meets UL94V-2 Flammability Classification.
- For use at temperatures not exceeding 85°C (185°F).
- Can be used on all standard and heavy-duty ties up to 48" and 175 lbs. tensile strength.
- Screw hole size: ¼".

Natural

Part No.	Base Dimension
SMNY001	⅝" x ⅞"

Black

Part No.	Base Dimension
SMNY001B	⅝" x ⅞"



Adhesive Bases

- Bases can be attached to a clean and dry surface of metal, plastic, glass, paper and painted surfaces.
- A screw or rivet is recommended for extra holding strength against outdoor elements.
- Bases made with durable 6/6 nylon with acrylic adhesive. Adhesive has a higher melting point.
- The counter-sunk hole for the screw or rivet will not interfere with the cable ties.
- Meets UL94V-2 Flammability Classification.
- The 4-way adhesive bases can be used on all self-locking ties up to 14" and 75 lb. tensile strength.

Mini 4-way Entry

Part No.	Base Dimen.	Color
TRMPS	¾" x ¾"	Natural
TRMPSB	¾" x ¾"	Black





Nylon Cable Clamps

- Nylon 6/6 clamps are tough, resilient, lightweight and resistant to aging and most chemicals.
- Mounting hole is $\frac{1}{4}$ " diameter.
- Meets UL flammability, classification UL 94V-2.
- Recognized under the Component Program of Underwriters Laboratories Inc.

Natural			Black		
Part No.	Sugg. Clamping Diameter	Sugg. Clamping Diameter	Part No.	Sugg. Clamping Diameter	Sugg. Clamping Diameter
6B18	$\frac{1}{8}$ "	$\frac{5}{8}$ "	6B18B	$\frac{1}{8}$ "	$\frac{9}{16}$ "
6B14	$\frac{1}{4}$ "	$\frac{13}{16}$ "	6B14B	$\frac{1}{4}$ "	$\frac{3}{4}$ "
6B516	$\frac{5}{16}$ "	$\frac{7}{8}$ "	6B516B	$\frac{5}{16}$ "	$\frac{7}{8}$ "
6B38	$\frac{3}{8}$ "	1"	6B38B	$\frac{3}{8}$ "	1"
6B12	$\frac{1}{2}$ "	1 $\frac{1}{2}$ "	6B12B	$\frac{1}{2}$ "	1 $\frac{1}{2}$ "



Body Clips

- Made from heat-treated spring steel with a black corrosion-resistant finish.
- Snap in place and securely hold wires, cables and hoses.


small body clip



medium body clip



large body clip



Plain Tongue	
Part No.	Size
BCS	small
BCM	medium
BCL	large

KATCO 
SERVICE PARTS INC.

